

GrandTwin A+ Server AS -2115GT-HNTF

2U 4-Node GrandTwin with up to 4 hot-swap 2.5" NVMe/SATA drives per node and front I/O



More details here

Key Applications



HPC, Cloud Gaming, MEC (Multi-Access Edge Computing), Multi-Purpose CDN, High-availability Cache Cluster, Telco Edge Cloud, EDA (Electric Design Automation), Mission Critical Web Applications,

Key Features

- Four **hot-pluggable** systems (nodes) in a 2U form factor. Each node supports the following;
- Single-Socket, AMD EPYC™ 9004/9005 Series Processors up to 360W TDP;
- 12 DIMM Slots , up to 3TB DDR5 memory;
- Flexible bays for either Storage or AIOM / OCP 3.0 slots;
- Integrated GrandTwin I/O Module with BMC, 2x USB, VGA and 2x 10GbE or 2x 25GbE;
- Up to 4 Hot-swap 2.5" NVMe/SATA drives;



| | |
|--------------------------|---|
| Form Factor | 2U Rackmount Enclosure: 449 x 88 x 711.2mm (17.67" x 3.46" x 28") Package: 626 x 248 x 1150mm (24.65" x 9.76" x 45.28") |
| Processor | Single processor(s) AMD EPYC™ 9004/9005 Series Processors (* AMD EPYC™ 9005 Series drop-in support requires board revision 2.x) Up to 160C/320T |
| System Memory | Slot Count: 12 DIMM slots Max Memory (1DPC): Up to 3TB 4800MT/s ECC DDR5 RDIMM (AMD EPYC™ 9004 Series Processor) Max Memory (1DPC): Up to 4.6TB 6000MT/s ECC DDR5 RDIMM (AMD EPYC™ 9005 Series Processor) |
| Drive Bays Configuration | Default: Total 4 bays <ul style="list-style-type: none"> • 4 front hot-swap 2.5" NVMe/SATA drive bays M.2: 2 M.2 NVMe/SATA slots (M-key) |
| Expansion Slots | Option A* <ul style="list-style-type: none"> • 1 PCIe 5.0 x16 LP slot Option B <ul style="list-style-type: none"> • 1 PCIe 5.0 x16 AIOM slot (OCP 3.0 compatible) |
| On-Board Devices | Chipset: AMD SP5 Network Connectivity: Via IO Module |
| Input / Output | LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 USB 3.0 ports Video: 1 VGA port |

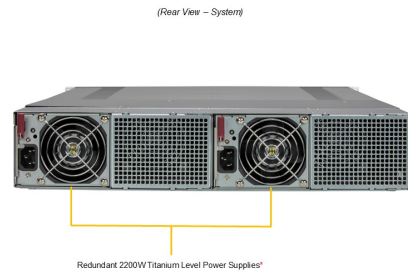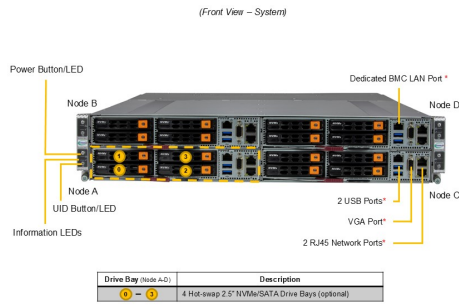

*Supported by GrandView IO Module

*Full redundancy based on configuration and application load

| | |
|-----------------------|---|
| System Cooling | Fans: 2x 17.6K RPM Heavy Duty 8cm Fan(s) Air Shroud: 1 per node Air Shroud |
| Power Supply | 2x 2200W Redundant (1 + 1) Titanium Level (96%) power supplies |
| System BIOS | BIOS Type: AMI 32MB Flash ROM |
| Management | SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New! |
| PC Health Monitoring | FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Voltage: Voltage, VBAT, Memory temperature, CPU temperature, 3.3V standby, +5V standby, +5V, +3.3V, +12V, VRM temperature, CPU thermal trip support, 1.8V standby |
| Dimensions and Weight | Weight: Gross Weight: 88 lbs (39.9 kg) Net Weight: 68 lbs (30.8 kg) Available Color: Silver |
| Operating Environment | RoHS Compliant Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -30°C to 60°C (-22°F to 140°F) Operating Relative Humidity: 8% to 80% (non-condensing) Non-operating Relative Humidity: 8% to 90% (non-condensing) |
| Motherboard | Super H13SST-G |
| Chassis | CSE-GT214BF-R2K21BP |