

IoT SuperServer SYS-211SE-31D

X13 SuperEdge 2U3-Node UP front I/O short-depth server



More details here

Key Applications


Multi-Access Edge Computing, Flex-RAN, Open-RAN vBBU, Telecom DRAN, CRAN, and Edge Core Application, Enterprise Edge Computing,

Key Features

- Three **hot-pluggable** systems (nodes) in a 2U form factor. Each node supports the following;
- Single Socket E (LGA-4677) 5th Gen Intel® Xeon®/4th Gen Intel® Xeon Scalable processors (per node);
- 8 DIMMs; Up to 2TB ECC DDR5-5600MT/s; R-DIMM / R-DIMM 3DS (per node);
- 2 PCIe Gen5 x16 FHHL slot and 1 PCIe Gen5 x16 HHHL slot (per node);
- 2 NVMe M.2 2280/22110 (per node);
- 4 counter-rotated fan speed control (per node); 1 Air Shroud (per node);
- Front-access 1+1 Redundant 2000W DC Power Supplies (per system);
- Operating Temperature 0°C to 35°C (32°F to 95°F) CPU TDP max 300W
Operating Temperature 0°C to 55°C (32°F to 131°F) CPU TDP max 205W
Operating Temperature -5°C to 55°C (23°F to 131°F) CPU TDP max 205W (Short Term);



| | |
|--------------------------|---|
| Form Factor | 2U Rackmount Enclosure: 449 x 88 x 430mm (17.7" x 3.5" x 16.9") Package: 750 x 240 x 590mm (29.5" x 9.5" x 23.2") |
| Processor | Single Socket E (LGA-4677) 5th Gen Intel® Xeon® / 4th Gen Intel® Xeon® Scalable processors Up to 52C/104T; Up to 97.5MB Cache |
| System Memory | Slot Count: 8 DIMM slots/1 Channels Max Memory (1DPC): Up to 2TB 5600MT/s ECC DDR5 RDIMM |
| Drive Bays Configuration | 2 M.2 PCIe 5.0 x4 NVMe slots (M-key 2280/22110; VROC required for RAID) |
| Expansion Slots | Default <ul style="list-style-type: none"> • 1 PCIe 5.0 x16 HHHL slot • 2 PCIe 5.0 x16 FHHL slots |
| On-Board Devices | Chipset: Intel® C741 Network Connectivity: 1 RJ45 1GbE with Intel® I210-AT |
| Input / Output | LAN: 1 RJ45 1 GbE LAN port (Intel® I210-AT) (IPMI shared on LAN port 1) TPM: 1 TPM header Others: 1 KVM dongle (output 1x VGA/1x COM/2x USB 2.0 via KVM cable) port |

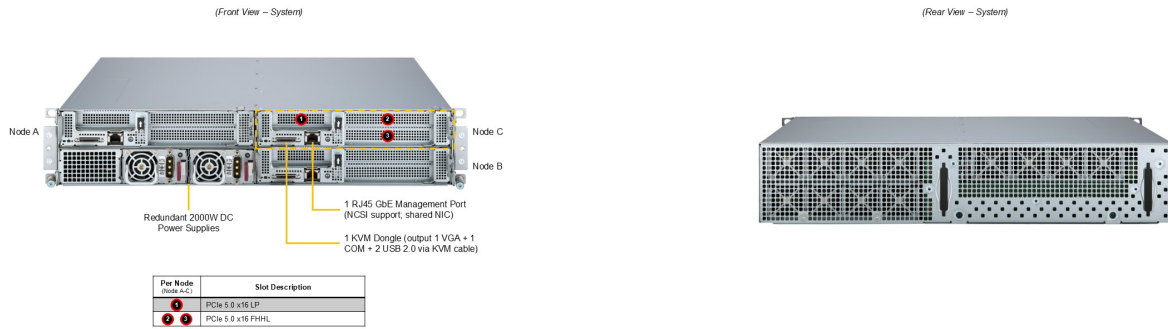

| | |
|-----------------------|--|
| System Cooling | Fans: 12x 4cm heavy duty fans with optimal fan speed control 40x40x56mm Fan(s) Air Shroud: 3 Air Shrouds |
| Power Supply | 2x 2000W Redundant (1 + 1) power supplies |
| System BIOS | BIOS Type: AMI 256MB SPI Flash |
| Management | SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New! |
| PC Health Monitoring | CPU: Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment CPU thermal trip support, PEPI |
| Dimensions and Weight | Weight: Gross Weight: 70.6 lbs (32 kg) Net Weight: 55.1 lbs (25 kg) Available Color: Silver |
| Operating Environment | RoHS Compliant Operating Temperature: 0°C to 35°C (32°F to 95°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing) |
| Motherboard | Super X13SEED-F |
| Chassis | CSE-SE201-R2K06P |