

# SuperWorkstation SYS-740A-T

DP 4U rackmount tower workstation for rendering, CAD and content creation



More details here

## Key Applications



Rendering, CAD, Multimedia/Digital Content creation, Engineering/scientific research,

## Key Features

- 3rd Gen Intel® Xeon® Scalable processor support;
- Intel® C621A Chipset;
- 5 PCIe 4.0 x16, 1 PCIe 4.0 x8, 2 NVMe M.2 slots;
- 3x 5.25" peripheral drive bays  
up to 4x NVMe SSD support with optional cables  
8x 3.5/2.5" hot-swap SATA (default) drive bays (SAS support requires optional add-on card);
- Dual 1200W Titanium level power supplies for high powered configurations;
- Supports up to two double width active GPUs  
1 VGA, 6 USB 3.2 Gen1 (4 Rear, 2 Front), 1 USB 3.2 Gen2 (Rear), 7.1 HD Audio;



<b>Form Factor</b>	4U Tower Rackmount Enclosure: 178 x 452 x 647mm (7" x 17.8" x 25.5") Package: 356 x 625 x 795mm (14" x 24.6" x 31.3")
<b>Processor</b>	Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 40C/80T; Up to 60MB Cache per CPU
<b>GPU</b>	Max GPU Count: Up to 2 double-width or 2 single-width GPUs Supported GPU: NVIDIA PCIe: RTX A6000, RTX A5000, RTX A4000, RTX 5000 CPU-GPU Interconnect: PCIe 4.0 x16 Switch Single-Root
<b>System Memory</b>	Slot Count: 16 DIMM slots Max Memory (2DPC): Up to 2TB 3200MT/s ECC DDR4 RDIMM/LRDIMM Supports Intel® Optane™ persistent memory 200 series
<b>Drive Bays Configuration</b>	Default: Total 8 bays <ul style="list-style-type: none"> <li>• 4 front hot-swap 3.5" SAS*/SATA drive bays</li> <li>• 4 front hot-swap 3.5" NVMe*/SATA drive bays</li> </ul> (*NVMe/SAS support may require additional storage controller and/or cables) M.2: 2 M.2 NVMe slots (M-key) Peripheral Bays: 3 5.25" peripheral bays (optional)
<b>Expansion Slots</b>	Default <ul style="list-style-type: none"> <li>• 5 PCIe 4.0 x16 FHFL slots</li> <li>• 1 PCIe 4.0 x8 FHFL slot</li> </ul>
<b>On-Board Devices</b>	SATA: SATA (6Gbps) ; RAID 0/1/5/10 support Chipset: Intel® C621A Network Connectivity: 2 RJ45 1GbE
<b>Input / Output</b>	LAN: 2 RJ45 1 GbE LAN ports (IPMI shared on LAN port 1) USB: 4 USB 3.2 Gen1 ports(rear) 2 USB 3.2 Gen1 ports(front) Video: 1 VGA port DOM: 2 SATA <a href="#">DOM</a> (Disk on Module) ports Audio: 7.1 HD Audio

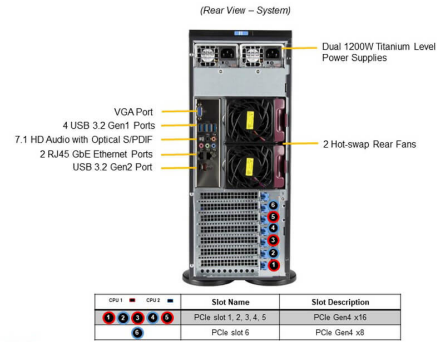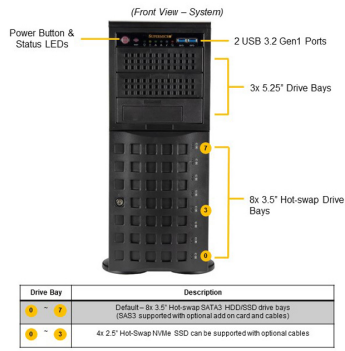

System Cooling	Fans: 5x 8cm heavy duty fans with optimal fan speed control
Power Supply	1x 1200W Redundant Titanium Level (96%) power supply
System BIOS	BIOS Type: AMI 32MB SPI FLASH ROM
Management	SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors CPU: Monitors for CPU Cores, Chipset Voltages, Memory.
Dimensions and Weight	Weight: Gross Weight: 62 lbs (28.12 kg) Net Weight: 59 lbs (26.76 kg) Available Color: black
Operating Environment	Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	<a href="#">Super X12DAI-N6</a>
Chassis	<a href="#">CSE-745BTS-R1K23BP3</a>