

IoT SuperServer SYS-E302-12D-4C

Embedded Mini-ITX Fanless Box with Intel Xeon D processor



More details here

Key Applications

IoT Gateway, Network Security Appliance, SD WAN, Embedded Networking Applications, Retail, Industrial Automation, Artificial Intelligence, Machine Learning,

Key Features

- Wall Mount Bracket;
- Intel® Ice Lake Xeon D-1718T 10MB 4 Cores 2.6GHz, 46W;
- Up to DDR4 2933MHz 256GB RDIMM or 128GB RDIMM;
- 6 Networking Interface (2 x25G SFP28, 4 x 1GbE)
 - 1 Dedicated IPMI LAN;
- 1x 2.5" SATA drives and 1x M.2 M-Key 2280;
- Fanless Cooling
 - Operating Temperature: 0°C to 45°C (32°F to 113°F);
- 180W 12V Lockable DC Power Adapter;




Form Factor	Fanless Embedded Enclosure: 295 x 76 x 206mm (11.6" x 3" x 8.1") Package: 418 x 305 x 194mm (16.45" x 12" x 7.6")
Processor	Single FCBGA-2227 Intel® Xeon® Processor D-1718T Up to 4C/8T; Up to 10MB Cache
System Memory	Slot Count: 4 DIMM slots Max Memory (2DPC): Up to 256GB 2933MT/s ECC DDR4 RDIMM
Drive Bays Configuration	Default: Total 1 bay <ul style="list-style-type: none"> • 1 internal fixed 2.5" NVMe/SATA drive bay M.2: 1 M.2 PCIe 3.0 x4 NVMe/SATA slot (M-key 2280)
Expansion Slots	1 M.2 PCIe 3.0 x1 NVMe slot (E-key 2230) 1 M.2 PCIe 3.0 x2 NVMe/SATA slot (B-key 2280/3042/3052)
On-Board Devices	Chipset: Intel® SoC Network Connectivity: 4 RJ45 1GBASE-T 2 SFP28 25GbE
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port 2 SFP28 25 GbE LAN ports 4 RJ45 1 GbE LAN ports USB: 2 USB 3.0 ports Video: 1 VGA port

(Front View – System)



(Rear View – System)

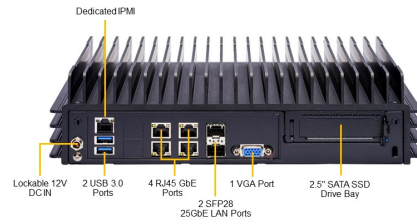

System Cooling

Fans: N/A

Power Supply

1x 180W power supply

System BIOS

BIOS Type: AMI 32MB UEFI
 BIOS Features: ACPI 6.3
 UEFI 2.7
 SMBIOS 3.3
 PCI FW 3.0

Management

SuperCloud Composer; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!

Dimensions and Weight

Weight: Gross Weight: 12 lbs (5.44 kg)
 Net Weight: 8 lbs (3.63 kg)
 Available Color: Black

Operating Environment

Operating Temperature: 0°C to 40°C (32°F to 104°F)
 Non-operating Temperature: -40°C to 70°C (-40°F to 158°F)
 Operating Relative Humidity: 8% to 90% (non-condensing)
 Non-operating Relative Humidity: 5% to 95% (non-condensing)

Motherboard

Super X12SDV-4C-SP6F-01

Chassis

CSE-E302iL