

# GPU SuperServer ARS-221GL-NR

DP NVIDIA Grace Superchip system with up to 2 L40S or 2 single non-bridged NVIDIA H100 NVL



More details here

## Key Applications

High Performance Computing, AI/Deep Learning Training, Large Language Model (LLM) Natural Language Processing, General purpose CPU workloads, including analytics, data science, simulation, HPC, application servers, and more,


## Key Features

- High density 2U GPU system with up to 2 NVIDIA® PCIe GPUs  
PCIe-based NVIDIA H100 NVL and NVIDIA L40s;
- Energy-Efficient NVIDIA Grace™ CPU Superchip with 144 Cores;
- Up to 960GB ECC LPDDR5X onboard memory option for minimum latency and maximum power efficiency;
- 5 PCIe 5.0 x16 FHFL Slots;
- 4 E1.S NVMe Storage Support;




Form Factor	2U Rackmount Enclosure: 438.4 x 88 x 900mm (17.25" x 3.46" x 35.43") Package: (22.5" x 11" x 45.5")
Processor	Dual processor(s) NVIDIA Dual 72-core CPUs on a Grace™ CPU Superchip
GPU	Max GPU Count: Up to 2 double-width GPUs Supported GPU: NVIDIA PCIe: H100 NVL, L40S CPU-GPU Interconnect: PCIe 5.0 x16 CPU-to-GPU Interconnect GPU-GPU Interconnect: PCIe
System Memory	Slot Count: Onboard Memory Max Memory: Up to 960GB ECC LPDDR5X
Drive Bays Configuration	Default: Total 4 bays <ul style="list-style-type: none"> <li>• 4 front hot-swap E1.S NVMe drive bays</li> </ul> M.2: 2 M.2 PCIe 5.0 x4 NVMe slots (M-key 22110)
Expansion Slots	Default <ul style="list-style-type: none"> <li>• 3 PCIe 5.0 x16 FHFL slots</li> <li>• 2 PCIe 5.0 x16 FHFL double-width slots</li> </ul>
On-Board Devices	Chipset: NVIDIA C2 Network Connectivity: 1 RJ45 1GbE IPMI: Support for Intelligent Platform Management Interface v.2.0 IPMI 2.0 with virtual media over LAN and KVM-over-LAN support
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port USB: 2 USB 3.0 Type-A ports(Rear) Video: 1 mini-DP port TPM: 1 TPM Onboard/port 80

(Front View – System)

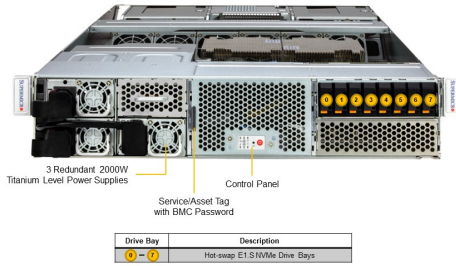

(Rear View – System)

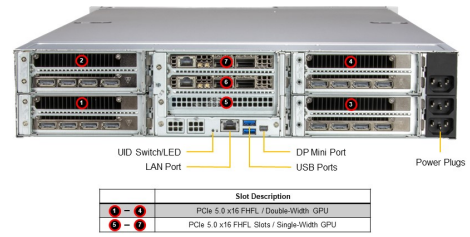

System Cooling	Fans: 6 heavy duty fans with optimal fan speed control
Power Supply	3x 2000W Redundant Titanium Level (96%) power supplies
System BIOS	BIOS Type: AMI 32MB SPI Flash EEPROM
Management	Redfish API; Supermicro Update Manager (SUM); KVM with dedicated LAN ; IPMI 2.0; Watch Dog; OOB Management Package (SFT-OOB-LIC )
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 86.5 lbs (39.2 kg) Net Weight: 67.5 lbs (30.6 kg) Available Color: Black front & silver body
Operating Environment	Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
Motherboard	<a href="#">Super G1SMH</a>
Chassis	<b>CSE-GP201TS-R000NP</b>