

MegaDC A+ Server ASG-1014S-ACR12N4H

1U UP internal-mounted storage server with 12 hot-swap 3.5" SAS/SATA + 4 7mm 2.5" U.2 NVMe and PCIe 4.0



More details here

Key Applications



Database Applications, Hyperscale Data Center, Object Storage, Big Data Analytics, Scale-Out Density, Hadoop & Ceph storage solutions, Scale-out NAS,

Key Features

- Single AMD EPYC™ 7003/7002 Series Processor (7003 Series Processor drop-in support requires BIOS version 2.0 or newer);
- 16 DIMMs; Up to 4TB 3DS ECC Registered DDR4-3200MHz RDIMM/LRDIMM;
- 2 PCIe 4.0 x16 (FHHL) Slots, 1 PCIe 4.0 x16 (LP) Slot;
- 2x 10GBase-T LAN ports via Broadcom BCM57416 Controller;
- 12x 3.5" SAS3/SATA3 Hot-Swap Drive Bays, 4x 2.5" 7mm U.2 NVMe Hot-Swap Drive Bays;
- 800W Redundant Power Supplies Platinum Level High-efficiency (Full redundancy based on configuration and application load.);
- RAID support via Broadcom® 3916;
- 1 VGA, 1 COM, 4 USB3.0 (4 Rear, 1 Type A), 2 USB2.0 (2 Front);



Form Factor	1U Rackmount Enclosure: (17.6" x 1.7" x 37") Package: (27" x 12" x 53.15")
Processor	Single Socket SP3 AMD EPYC™ 7003/7002 Series Processor
System Memory	Slot Count: 16 DIMM slots/8 Channels Max Memory (2DPC): Up to 8TB 3200MT/s ECC DDR4 RDIMM/LRDIMM
Drive Bays Configuration	Default: Total 16 bays <ul style="list-style-type: none"> • 12 internal hot-swap 3.5" SAS/SATA drive bays • 4 front hot-swap 7mm PCIe 4.0 x2 NVMe drive bays M.2: 2 M.2 PCIe 4.0 x2 NVMe slots (M-key 22110(default)/2280)
Expansion Slots	PCI-Express (PCIe) Configuration: Default <ul style="list-style-type: none"> • 1 PCIe 4.0 x16 (in x16) HHHL slot • 2 PCIe 4.0 x16 (in x16) FHHL slots M.2: 2 M.2 PCIe 4.0 x2 NVMe slots (M-key 22110(default)/2280)
On-Board Devices	SAS: SAS (12Gbps) via Broadcom® 3916; RAID 0/1/5/6/10/50/60 support NVMe: NVMe; (Native) Chipset: AMD System on Chip Network Connectivity: 2 RJ45 10GBASE-T with Broadcom® BCM57416
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port 2 RJ45 10 GBASE-T LAN ports (Broadcom® BCM57416) USB: 2 USB 2.0 Type-A ports(front) 4 USB 3.0 Type-A ports(Rear) Video: 1 VGA port(Rear) Serial: 1 COM port(Rear) DOM: 2 Super DOM (Disk on Module) ports with built-in power TPM: 1 TPM header

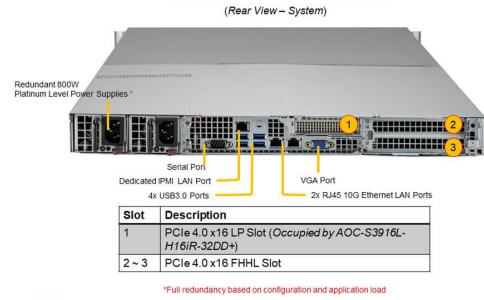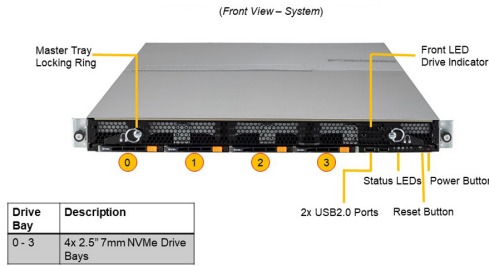

System Cooling	Fans: 6 Heavy Duty 4cm Fan(s)
Power Supply	2x 800W Redundant (1 + 1) Platinum Level (94%) power supplies
System BIOS	BIOS Type: AMI 256MB SPI Flash EEPROM
Management	SuperCloud Composer; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!
PC Health Monitoring	CPU: Monitors for CPU Cores, Chipset Voltages, Memory 4+1 Phase-switching voltage regulator FAN: Fans with tachometer monitoring Status monitor for speed control Pulse Width Modulated (PWM) fan connectors Temperature: Monitoring for CPU and chassis environment Thermal Control for fan connectors
Dimensions and Weight	Weight: Gross Weight: 58 lbs (26.3 kg) Net Weight: 39.5 lbs (17.9 kg) Available Color: Black
Operating Environment	RoHS Compliant Operating Temperature: 10°C ~ 35°C (50°F ~ 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (Non-Condensing) Non-operating Relative Humidity: 5% to 95% (Non-Condensing)
Motherboard	Super H12SSW-NTR
Chassis	CSE-802TS-R804WBP