

# Storage SuperServer SSG-620P-ACR16L

2U front-loading storage server with 16 hot-swap 3.5" hybrid SAS/SATA bays and PCIe 4.0



More details here

## Key Applications


Enterprise Server, iSCSI SAN, HPC, Data Center, Database Processing & Storage, Corporate Database,

## Key Features

- Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable Processors;
- 16 ECC DDR4-3200: LRDIMM/RDIMM + 2 Intel® Optane™ Persistent Memory Dedicated Slots;
- 2x 10Gbe;
- 16x 3.5" hot-swap hybrid SATA/SAS drive bays (4 NVMe Hybrid Ports); 2 Rear SATA Slots; onboard 1 M.2 NVMe;
- 3 heavy duty fans with optimal fan speed control; 1 Air Shroud;
- 1600W Redundant Power Supplies Titanium Level (96%);
- Broadcom® 3816 Controller;



Form Factor	2U Enclosure: 437 x 89 x 705mm (17.2" x 3.5" x 27.75") Package: 658 x 274 x 998mm (25.9" x 10.8" x 39.3")
Processor	Dual Socket P+ (LGA-4189) 3rd Gen Intel® Xeon® Scalable processors Up to 38C/76T; Up to 57MB Cache per CPU
System Memory	Slot Count: 16 DIMM slots Max Memory (2DPC): Up to 4TB 3200MT/s ECC DDR4
Drive Bays Configuration	Default: Total 18 bays <ul style="list-style-type: none"> <li>• 8 front hot-swap 3.5" SAS/SATA drive bays</li> <li>• 4 internal hot-swap 3.5" SAS/SATA drive bays</li> <li>• 4 front hot-swap 3.5" NVMe*/SAS/SATA drive bays</li> <li>• 2 rear hot-swap 2.5" SAS*/SATA drive bays</li> </ul> (*NVMe/SAS support may require additional storage controller and/or cables) M.2: 1 M.2 NVMe slot (M-key)
Expansion Slots	Default <ul style="list-style-type: none"> <li>• 4 PCIe 4.0 x16 LP slots</li> <li>• 1 PCIe 4.0 x8 LP slot</li> </ul>
On-Board Devices	Chipset: Intel® C621A Network Connectivity: 2 RJ45 10GBASE-T with Intel® X550
Input / Output	LAN: 1 RJ45 1 GbE Dedicated BMC LAN port 2 RJ45 10 GBASE-T LAN ports USB: 4 USB 3.0 ports(rear) Video: 1 VGA port DOM: 2 Super <a href="#">DOM</a> (Disk on Module) ports

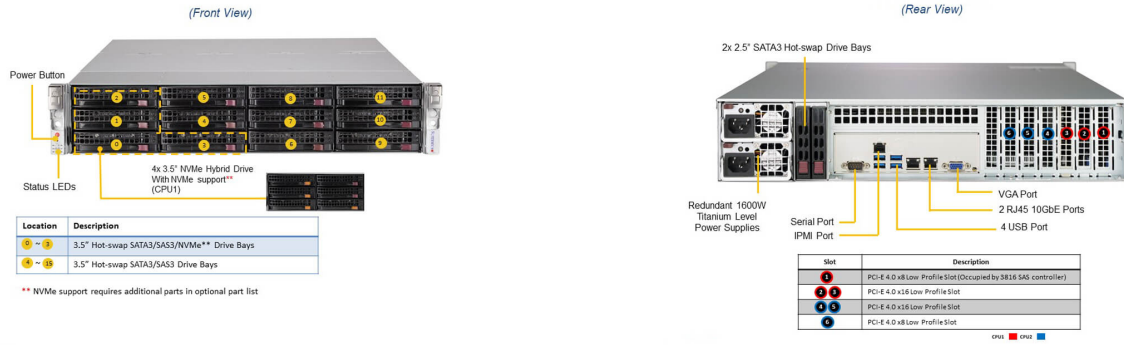

**System Cooling** Fans: 4 Heavy Duty 8cm Fan(s)  
Air Shroud: 1 Air Shroud

**Power Supply** 2x 1600W Redundant Titanium Level (96%) Hot-plug power supplies

**System BIOS** BIOS Type: AMI 128MB SPI Flash EEPROM

**Management** SuperCloud Composer®; Supermicro Server Manager (SSM); Supermicro Update Manager (SUM); Supermicro SuperDoctor® 5 (SD5); Super Diagnostics Offline (SDO); Supermicro Thin-Agent Service (TAS); SuperServer Automation Assistant (SAA) New!

**PC Health Monitoring** CPU: Monitors for CPU Cores, Chipset Voltages, Memory  
4+1 Phase-switching voltage regulator  
FAN: Fans with tachometer monitoring  
Status monitor for speed control  
Pulse Width Modulated (PWM) fan connectors  
Temperature: Monitoring for CPU and chassis environment  
Thermal Control for fan connectors

**Dimensions and Weight** Weight: Gross Weight: 62 lbs (28.12 kg)  
Net Weight: 41.5 lbs (18.82 kg)  
Available Color: Black

**Operating Environment** RoHS Compliant  
Operating Temperature: 10°C to 35°C (50°F to 95°F)  
Non-operating Temperature: -40°C to 60°C (-40°F to 140°F)  
Operating Relative Humidity: 8% to 90% ( )  
Non-operating Relative Humidity: 5% to 95% ( )

**Motherboard** [Super X12DPi-NT6](#)

**Chassis** [CSE-829HE1C4-R1K62LPB](#)